

# GA3555 Outlet Kit Installation Instructions

## NOTICE

**A qualified electrician must connect electrical wiring to duplex outlet for built-in installation. Follow all local codes.**


**IMPORTANT:** Read entire instruction sheet before installing GA3555 Outlet.

This outlet kit contains the following:


Qty.	Part No.	Description
1	103706-01	4" x 5 1/4" Silver Shield
2	097399-01	Black Screws, #8 x 3/8"
1	M12461-2	Zinc Screw, #6-32 x 3/8"
1	103769-01	Duplex Receptacle
1	103771-01	Strain Relief Fitting

If any of these parts are missing or damaged, contact dealer where you purchased this kit. If they cannot supply original replacement parts, call DESA International's Parts Department at 1-800-972-7879 for referral information.

1. Install blower assembly per instruction sheet included.
2. Before replacing bottom of firebox, install duplex outlet to the right support bracket in the bottom of firebox (see Figure 1).
3. Route wires from electrical box through smallest hole in outer casing using strain relief fitting provided (see Figure 1).
4. Connect wires from the electrical box to duplex outlet. Match wire colors to those indicated on duplex outlet. Be sure to connect ground wire.
5. Install shield to end of right support bracket and behind the firebox wrapper with 2 screws provided (see Figure 2).
6. Plug blower power cord into duplex outlet. *Note:* On thermostat model fireplaces, route power cord to the back of the fireplace to clear thermostat valve (see Figure 2).
7. Replace bottom of firebox.

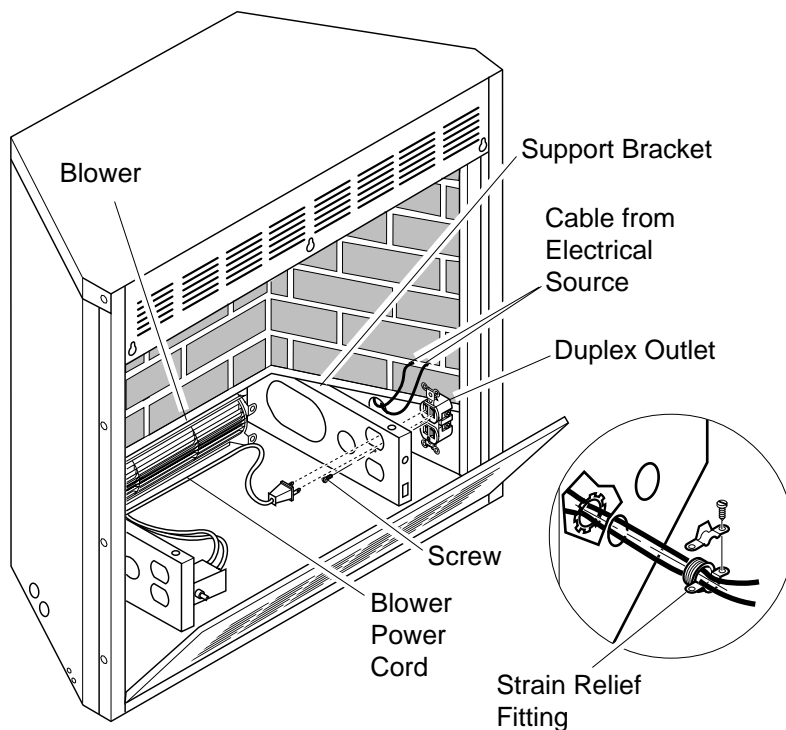

**Figure 1 - Installing Duplex Outlet**

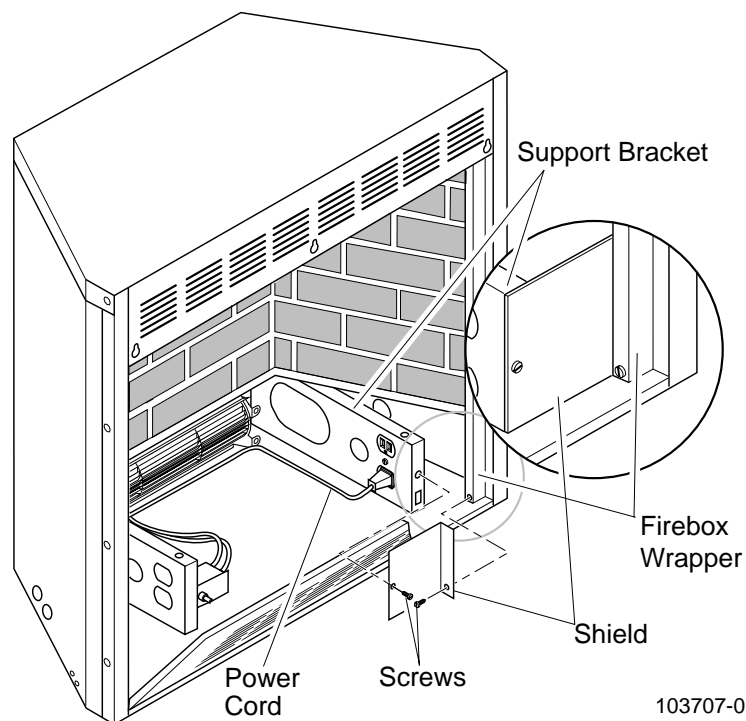

**Figure 2 - Installing Shield**

## DESA International

2701 Industrial Drive, P.O. Box 90004  
Bowling Green, KY 42102-9004  
Technical Service Department 1-800-323-5190  
Parts Department 1-800-972-7879

103707-01  
Rev. C  
10/99